

SAFEROAD®

Have a safe journey

Manual for the
Installation, Maintenance & Repair of
MEGARAIL
VRS Systems
Including Steel Step Barrier



REVISION 23

December 2020

SAFEROAD®

Contents

- 1- General
 - 1-1 Scope
 - 1-2 Quality Assurance
 - 1-3 Durability
 - 1-4 Product Design Warranty and Liability
 - 1-5 Training
 - 1-6 Health and Safety

- 2- Design Requirements
 - 2-1 Set back
 - 2-2 Containment level
 - 2-3 Working Width
 - 2-4 Vehicle intrusion
 - 2-5 MegaRail systems information
 - 2-6 System progression
 - 2-7 Visibility
 - 2-8 Sloping Ground
 - 2-9 MEGARAIL Height
 - 2-10 Length of MEGARAIL
 - 2-11 Post Foundations

- 3- Limitations on Use

- 4- Installation
 - 4-1 Setting out
 - 4-2 Driven Posts
 - 4-3 Concrete Foundations
 - 4-4 Surface Mounted Posts

- 5- MEGARAIL Assembly
 - 5-1 N2, H1 & H2 systems
 - 5-2 Connection to TCB & OBB
 - 5-3 Mega Guard
 - 5-4 Mega Flex
 - 5-5 Safe End P1
 - 5-6 Safe End P4
 - 5-7 Connection to Other Proprietary VRS
 - 5-8 Installation on Curves

3 Revision 23 December 2020

6- Inspection Maintenance and Repair

- 6-1 Inspection
- 6-2 Maintenance
- 6-3 Repair
- 6-4 Innovation

7 – Driven and Foundation Post Foundation Testing

- 7-1 Ground Conditions
- 7-2 Soil test criteria
- 7-3 Recording Foundation Test Results

8 - Post Foundation Test Procedure

- 8-1 Procedure
- 8-2 Push Test drawings
- 8-3 Pressure Loading Chart

9 - Company Contact Details

1. General

1.1 Scope

This manual sets out the procedures for the installation, repair, inspection and maintenance of all MegaRail vehicle restraint systems both new and in service supplied by SAFEROAD (inclusive of Mega Guard, terminals, transitions, steel step corridor & steel step barrier gates). MegaRail has been designed and impact tested in accordance with the performance specification laid down in EN 1317 for classes N2, H1 and H2. The product range has been carefully selected and developed from the SAFEROAD broader range of systems to suit the requirements of the UK highways network and is compatible with all Non-proprietary Safety barrier Systems (NPSBS) and all reputable EN 1317 proprietary systems.

1.2 Quality Assurance

SAFEROAD are fully compliant with BS EN ISO 9001, and have procedures in place to ensure compliance with EN 1317. SAFEROAD are committed to providing quality products and services which fully comply with the specification.

1.3 Durability

SAFEROAD's Megarail products have a minimum serviceable life of twenty years, this covers all safety barrier, terminals, transitions and crash cushions.

1.4 Product Design, Warranty and Liability

The product assurances given by SAFEROAD for design, warranty and liability for the MegaRail family of products will be invalidated if it is demonstrated that components have been used from an unapproved source in installation, maintenance or repair and if the VRS does not comply with SAFEROAD's specifications. Due to Saferoad's research and development program, systems are evolving constantly, so before installation reference should be made to the Saferoad website to ensure that you are working to the latest drawings.

When connecting to another safety barrier system we recommend that the screws in the joint or beam lap should be supplied by SAFEROAD unless the other promoter gives express permission to use their fasteners in which instance SAFEROAD will accept the connection as long as the system being connected to is fully tested and approved to EN 1317 or is an NPSBS safety barrier.

1.5 Training

SAFEROAD's policy is that all works to install, repair, inspect and maintain MegaRail VRS on UK roads must be undertaken by fully trained and properly qualified personnel in accordance with the mandatory requirements of Sector Scheme 10B and as specified in the Design Manual for Roads & Bridges (DMRB) volume 2 section 2 part 8, TD 19/06 clause 1.17 and the Specification for Highway works Volume 1 clause 104. Sector Scheme 10B

training is available from SAFEROAD's Lantra Awards approved training centre. SAFEROAD's training policy extends to anyone installing MegaRail from outside of the UK who already has MegaRail training and therefore these erectors must also have the LANTRA basic training for safety barriers. For details of available training contact SAFEROAD. (Company contact details on page 28)

1.6 **Health and Safety**

It is the installer's responsibility to ensure that all necessary safety procedures are in place and implemented at all times. The site specific conditions and restrictions should be assessed and a risk assessment, method statement and lift plan produced by the installer for the specific site. All endeavours must be used to ensure that no one is injured or put at risk during the installation, repair, inspection or maintenance of the MegaRail VRS systems.

2. **Design Requirements**

The installation, inspection and repair of the MegaRail family of products must comply with the requirements of The Specification for Highways Works series 400, TD 19/06, TD 27/05, EN 1317 and SAFEROAD product specifications. It is important to note that whilst product specification is constant, the requirements of Highways Authorities across Europe will have differing constraints. This manual only takes cognisance of the requirements in the UK.

2.1 **Set Back**

Set Back should normally be as described in the table below, but the Design Organisation may use further relaxations in accordance with the notes on the table which is taken from TD 27/05 chapter 4.

Location	Desirable minimum setback value (mm)	Available relaxations at sites described in footnotes
In verges with no adjacent hard shoulder or hard strip	1200	Note (i), (ii)
In verges with an adjacent hard shoulder or hard strip	600	Note (iii)
Central reserves	1200	Note (i), (ii)
Design Organisations may, where justified, consider Relaxations to set-back as follows:		
(i)	Relaxation to 600mm for roads of speed limit 50mph or less (including temporary mandatory speed limits).	
(ii)	Relaxation to 1000mm at existing roads with physical restraints (e.g. a structure) where it would be difficult to provide the desirable value.	
(iii)	Relaxation to 450mm will be permitted where it is considered necessary to position the VRS away from the edge of an existing embankment in order to provide support to the foundation.	

If both set back and working width cannot be achieved, we recommend that set back should be reduced and working width maintained.

In central reserves where there are two single sided safety barriers it must be ensured that the working width is maintained between the two.

Note: For either of the above situations, a departure from standard must be obtained from the overseeing authority.

2.2 Containment level

This is the type of vehicle the system is designed to retain at a given speed and angle of impact, see table below for the test criteria.

Containment level	Test Vehicle	Test speed		Impact angle
		KPH	MPH	
N2	1500kg Car	110	68	20 degrees
	900kg Car	100	62	20 degrees
H1	10000kg Rigid HGV	70	44	15 degrees
	900kg Car	100	62	20 degrees
H2	13000kg Bus	70	44	20 degrees
	900kg Car	100	62	20 degrees

The system identification is made up of the containment level and the working width for example N2 W2 for details of the available systems and the post centres please see the table overleaf and the working width table below.

2.3 Working Width


The working width is the distance between the traffic face of the VRS and the furthest point of deflection and therefore a safety barrier should be selected to suit the location, see table below for working width classes

Classes of normalised working widths	Levels of normalised working widths
W1	≤ 600mm
W2	≤ 800mm
W3	≤ 1000mm
W4	≤ 1300mm
W5	≤ 1700mm
W6	≤ 2100mm
W7	≤ 2500mm
W8	≤ 3500mm

2.4 Vehicle intrusion

Consideration must be given to the available space behind the VRS system to ensure that the errant vehicle does not strike the obstruction when the system is impacted. Although a system may have a working width of $W2 \leq 800\text{mm}$ its class of normalised vehicle intrusion (VI) rating may be $VI4 \leq 1300\text{mm}$.

See sketch below.

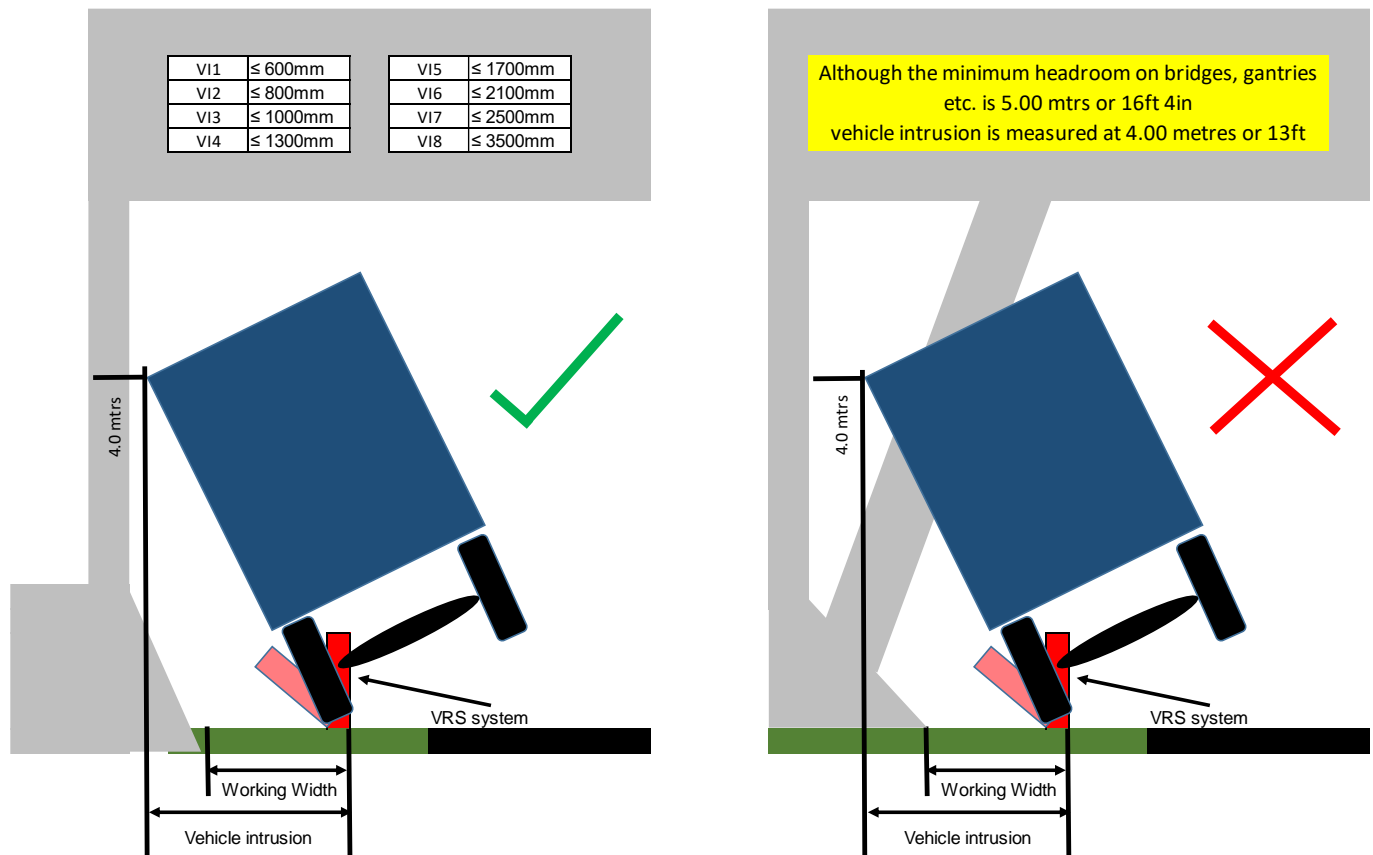

2.5 MegaRail systems Information

System	Rating	VI rating	Drawing reference	Post Type	Post centres	System height	Post Height	Beam	Torque values for fixings in Nm		
									M16 lap bolts	Diameter of post bolt	
ea	N2W1		eaN2W1A-GA-00	C100	1333mm	750	700	2.5mm	70 to 140	M16	70 to 140
es	N2W2		N2W2-GA-00	C125 Type A	2 mtr	700	630	3mm	70 to 140	M16	10 to 17
ep	N2W2	V15	N2W2/H1W3-GA-00	C100 with stiffener	4 mtr	750	700	2.5mm	70 to 140	M16	70 to 140
VIK CC2	N2W3		N2W3-GA-00	Sigma Type B	2 mtr	750	620	VIK 3mm	70 to 140	M12	10 to 17
VIK CC4	N2W3		N2W3-GA-00	Sigma Type B	4 mtr	750	620	VIK 3mm	70 to 140	M12	10 to 17
ep c/c	N2W4		epN2W4-GA-00	C100 with stiffener	6 mtr	750	700	3mm	70 to 140	M16	70 to 140
en	N2W4		N2W4en-GA-00	C125 Type A	4 mtr	700	595	2.4mm	70 to 140	M10	10 to 17
Birista W2	N2W4		N2W4-GA-00	Sigma Type B	2 mtr or 4mtr	725	730	2mm	70 to 140	M10	10 to 17
ESP 4.0	N2W5		N2W5-GA-00	Sigma Type A & bracket	4 mtr	750	700	3mm	70 to 140	M10	10 to 17
MegaGuard	H2W1	V12	H2W1-GA-00	H	2 mtr	1250	1240	3mm & Backing beam	60 to 80	M16	25 to 30
sk	H2W2	V12	H2W2-GA-00	C125 Type B	1 mtr	1100	1090	3mm	70 to 140	M10	10 to 17
bs	H1W2	V13	H1W2-GA-00	C125 surface mounted	1333mm	700	595	3mm	70 to 140	M10	10 to 17
ex	H1W2	V14	exH1W2-GA-00	C100 with stiffener	3 mtr	750	700	2.5mm	70 to 140	M16	70 to 140
Safestar 231	H2W3	V13	H2W3-GA-00	C125 Type C	1500mm	900	790	Tri-Wave	70 to 140	M10	10 to 17
ep	H1W3	V15	N2W2/H1W3-GA-00	C100 with stiffener	4 mtr	750	700	2.5mm	70 to 140	M16	70 to 140
ec 3.3	H1W3	V14	H1W3-GA-00	C125 with strap	1333mm	700	595	3mm	70 to 140	M10	10 to 17
em	H1W4	V14	H1W4-GA-00	C125 Type A	2 mtr	700	595	2.4mm	70 to 140	M10	10 to 17

2.6 System progression

To maintain the system progression you can only change one working width at a time.
For the Megarail systems a minimum of four metres of that working width must be used.

This excludes the MegaFlex transition and the P4 & P1 terminals where the full length must be installed.

		NPSBS						Megarail System															
		N2W6 TCB	N2W5 OBB	N2W4 OBB	N2W5 ESP 4.0	N2W4 ep c/c	N2W4 en	N2W4 Birsta W2	N2W3 VIK CC2 & CC4	N2W2 ep	N2W2 es	N2W1 ea	H1W4 em	H1W3 ec 3.3	H1W3 ep	H2W3 Safestar 231 via progression	H1W2 ex	H1W2 bs	H2W2 sk via progression	H2 W1 Megaguard	MegaFlex transition	P4 Safe end	P1 Terminal
NPSBS	Megarail System connection compatability																						
	N2W6 TCB	█																					
	N2W5 OBB		█																				
	N2W4 OBB			█																			
	N2W5 ESP 4.0				█																		
	N2W4 ep c/c					█																	
Megarail System	N2W4 en						█																
	N2W4 Birsta W2							█															
	N2W3 VIK CC2 & CC4								█														
	N2W2 ep									█													
	N2W2 es										█												
	N2W1 ea											█											
	H1W4 em												█										
	H1W3 ec 3.3													█									
	H1W3 ep														█								
	H2W3 Safestar 231 via progression															█							
	H1W2 ex																█						
	H1W2 bs																	█					
	H2W2 sk via progression																		█				
	H2 W1 Megaguard																			█			
	MegaFlex transition																				█		
	P4 Safe end																					█	
	P1 Terminal																						█

2.7 Visibility

The design layout of the MegaRail shall comply with the sight distance requirements set out in TD 9. (DMRB 6.1)

2.8 Sloping Ground

The ground below the MegaRail shall be near level within the set back and working width as shown in TD 19/06 figures 3-1 and 3-2 Chapter 3.

2.9 MegaRail height

The MegaRail systems should be set to the heights shown on the drawings with a tolerance of plus or minus 50mm for all systems. Where the kerb height is less than 100mm and the distance between the face of the beam and the edge of the adjacent paved area is less than 1.5m the height should be measured from the edge of the paved area.

Where the kerb height is less than 100mm and the distance between the face of the beam and the edge of the adjacent paved area is greater than 1.5m the height should be measured from the ground beneath the beam.

See drawing MR-GA-001

On certain systems where the kerb height is more than 100mm and the distance between the face of the beam and the edge of the adjacent paved area is less than 250mm the height should be measured from the edge of the paved area.

Where the kerb height is more than 100mm and the distance between the face of the beam and the edge of the adjacent paved area is greater than 250mm the height should be measured from the top of the kerb.

See drawing MR-GA-003

See notes on system drawings to determine which method to use.

MegaRail installation and maintenance tolerances		
	Installation tolerance	Maintenance tolerance
Height	+/- 50mm	+/- 75mm
The maintenance tolerance can be used during installation when the safety barrier height reference is changing from carriageway to verge level or when connecting to an existing VRS.		
Alignment	+/- 30mm	+/- 30mm
Post centres	+/- 100mm	+/- 100mm

2.10 Length of MegaRail

The minimum length of MegaRail required to meet the length of need are as shown in the table below. Where MegaRail is being erected between other VRS systems, for example between two parapets, the minimum length can be to suit the need. EN 1317 states: the length of the safety barrier tested shall be sufficient to demonstrate the full performance characteristic of any longer length. It does not require a minimum length of installation.

VRS Containment level	Minimum full height lengths of VRS	
	In advance of hazard	Beyond hazard
N2	30m	7.5m
H1 or H2	30m	10.5m

2.11 Post Foundations

The type of post foundation used will be dictated by the ground conditions on the site. As a general rule, soil type ground properly compacted will allow the use of driven posts. The suitability of driven posts must be established by following the SAFEROAD testing procedure for MegaRail driven posts.

Where site conditions preclude the use of driven posts, the posts may be surface mounted or set in concrete foundations.

When using surface mounted posts, the anchors must be proven by applying the test loads set out in the SAFEROAD testing procedure for surface mounted MegaRail posts. The contractor must also prove by calculation that the foundation will resist the overturning moment and that the posts will become plastic before any movement in the foundation occurs at the initial type test angle as described in EN 1317.

For posts set in concrete foundations the same test criteria applies as for driven posts. However, this does not ensure a survivable foundation. A compliant foundation which will pass the soil test can move under impact such that it may need to be replaced when the VRS is repaired.

We recommend that survivable foundations are designed and installed wherever practical. We would suggest this is clarified with the scheme designers.

3. Limitations on Use

MegaRail VRS must be installed in accordance with BS EN 1317, series 400 MCHW, TD 19/06, TD 9 and TD 27/05.

Refer to 2.9 for minimum lengths.

Radii less than 30mtr must be factory formed and be N2 W2 es
Factory formed radii must not be less than 6m.

For radii from 30mtr to 50mtr N2 W2 es and 2mtr beams must be used as required.

Mega Guard is not suitable for Radii less than 80mtr

Mega Flex Transition must be installed in a straight line for the section that contains the backing beam, it then can be flared up to a maximum of 250mm.

3. Installation

It is the installers responsibility to ensure that they are working to the current manual and drawings.

These can be found at www.saferoad.co.uk/products/safety-barrier/

4.1 Setting Out

Establish the length of need both in advance and on departure from the hazard excluding terminal lengths. Set out the post pitches ensuring that the length of need is covered. If there are any obstructions on the fence line and if the site conditions do not allow a post to be installed on the system pitch deviations can be applied. The obstructed post can be omitted and extra posts installed to span the obstruction.

Please note that each system has different rules so refer to each system drawing GA-40 for details as to what can be done.

Although it would be beneficial to use the holes already in the beam it is acceptable to drill new holes on site in the desired position and treat the beam with a zinc rich paint to comply with the galvanising specification BS EN ISO 1461.

Another method of deviating is by using an offset post. The posts can be manufactured to suit the location within the following parameters, the base plate must be a minimum of 50mm thick and the offset plate no longer than 700mm. Refer to each system drawing GA-00 for details.

The post pitch must return to the correct system position within 8 metres of the last correctly positioned system post as and remain correctly positioned for a minimum of 4m.

If obstacles cannot be circumvented by these methods it may still be possible to provide a compliant design, contact our technical department whose details can be found at the back of this manual.

If a bridge expansion joint is to be spanned, then a pre-assembled expansion beam assembly should be installed as per drawing MR-GA-025. Where system progression is required, the progression should be by only one working width at a time. i.e. N2 W3 to N2 W2 or N2 W3 to N2 W4.

4.2 Driven Posts

Before any post driving is considered the area should be thoroughly checked for the presence of services. Wherever it is practicable, the installation of VRS over services should be avoided. We would recommend

a minimum of 500mm safe working distance between driven posts and adjacent services.

Ensure the correct post is used and that on the verge the closed side of the post faces the oncoming traffic. In the central reserve the closed side should face the oncoming traffic on the carriageway nearest the VRS.

Drive the posts to the correct height and line.

When driving the posts some minor damage to the post top is inevitable, however this is generally superficial and does not affect either performance of the post or serviceable life. Minor damage could be

Local crushing of galvanizing on post top.

Local micro cracking of posts.

Curling inwards of post top, local to top 10mm.

Driving times of more than 3.5 minutes for each post indicate that the ground conditions are too hard and excessive damage may occur to the posts and therefore in these circumstances concrete foundations should be used as an alternative to driven posts. Examples of excessive damage are Serious splitting of post top.

Distortion of preformed post holes

Curling inwards of post top, exceeding top 11mm

Unless the driven post has suffered significant deformation, it is unlikely to lead to any detrimental effect on the VRS performance.

Posts may be up to 5 degrees out of vertical alignment and up to 5 degrees out of rotational alignment without affecting the performance of the system. On rotational alignment, the face of post must be in contact with the beam for more than 75% of designed contact area.

It is also important to be aware that post damage does not only occur above the ground where it can be seen, hard ground conditions can cause an unacceptable amount of damage in the ground where it is not readily detectable.

Regarding damage to the galvanisation it is useful to note that during testing of VRS the thickness of galvanizing does **not** contribute to the performance level of the system, this is achieved through a combination of structural shape, steel thickness and grade. It can be reasonably taken that the system will still perform as tested even without any galvanized coating thickness. The specified minimum life laid down in the specification for highways works is generally exceeded in most situations as can be seen by inspection of galvanized systems that have been installed in excess of 30 years.

4.3 Concrete Foundations

Before any excavation is considered the area should be thoroughly checked for the presence of services. Wherever excavation is with a machine bucket, it is preferable that the bucket should not be fitted with teeth.

The foundation design and size should be established by the installation of test foundations before the actual permanent foundations are constructed. The test foundation should be designed so that the risk of displacement under impact is avoided when struck at type test angle. (See section 7)

- Establish post centres and excavate foundations to the size established. When constructing the foundations ensure there is a minimum of 100mm of concrete cover to the post socket (70mm on augured foundations). It is advisable to have some socket length protruding from the finished concrete level and up to 100mm is acceptable.
- Excess spoil should wherever possible should be spread locally to avoid unnecessary lorry movement and land fill otherwise it should be disposed of at a licensed tip. Or at an agreed location on site for disposal by others in a correct and environmentally responsible manner.
- Where the sides of the excavation cannot be kept vertical then suitable permanent or temporary casings shall be used.
- Place concrete in the foundation. Concrete should be able to resist the plastic moment of the post when loaded at 90 degrees (the posts strongest axis) ST5, C20/25 or higher grades of concrete are known to accommodate this un-compacted.

The suitability of any concrete foundation irrelevant of what concrete grade has been used can be demonstrated by destructive testing of posts within a particular foundation. To prove compliance the post must collapse without causing any cracking or other failing of the concrete. This is not to be confused with a soil test, when testing to destruction the foundation may move within the soil before the post collapses unless survivable foundations have been installed.

- Put the post and socket (if required) into the concrete, install the reinforcing ring and set the post to line and level. Make final adjustments to height and line before the initial set of the concrete. Slope the concrete away from the post and socket to help avoid corrosion where possible.
- The socket should be protected from the incursion of detritus by use of a filler such as expanding foam.(see series 400, 403.10)
- Where the concrete foundations are in filter drains they may require casings. The outside of the casing should be backfilled with uncontaminated filter media on the line of the filter drain, and backfilled with the excavated spoil elsewhere. A plastic membrane of at least 125 microns thick should be laid at the base to prevent contamination of the filter media. In some filter drains casings may not be required as the filter drain “stands up” and maintains vertical sides unaided. Consideration should be given by all parties on the best method of preventing contamination of the filter media, whilst taking into consideration that in certain circumstances contamination may not be an issue.
- It is critical when determining the size of all test foundations that the lack of ground support is considered and the foundation is of sufficient volume to

support the post and allow it to become plastic before the foundation is levered clear of the surrounding ground when the VRS is struck at the type test angle.

4.4 **Surface Mounted Posts**

- Surface mounted posts are normally only used in locations where driven or posts in sockets are not practicable, and therefore are often mounted on a concrete slab of limited thickness. It must be ensured that such a slab is adequately reinforced and is capable of resisting the overturning forces incurred under impact at the initial type test angle. This should be demonstrated through calculation and a design submitted to the overseeing authority for approval.
- The foundation should be excavated to the correct depth in a continuous length to at least the minimum length the design permits. Sides should be shuttered where required and the reinforcing steel set in place. Reinforcing should be designed in such a way that it is compatible with the use of SAFEROAD anchorage systems which is the preferred method of anchoring in a purpose-built foundation. However please note resin anchors can be used.
- Concrete should be placed directly from the delivery truck and compacted using vibration; posts on anchorages should be placed before the initial set of the concrete and set to line and level, the concrete should be re-vibrated around the anchorage after it has been placed in the concrete to ensure there are no voids.
- Excess spoil should wherever possible be spread locally to avoid unnecessary lorry movement and land fill otherwise it should be disposed of at a licensed tip. Or at an agreed location on site for disposal by others in a correct and environmentally responsible manner.
- Where the design organisation has deemed existing construction to be suitable to provide a foundation for surface mounted posts the posts will be installed on drilled anchors.
- The anchorage system must be installed in accordance with the manufactures instructions and tests must be carried out as specified in BS 5080 Part 1 to ensure the required strength has been achieved, see table below. The frequency of the tests will be not less than 1 in 20 or as specified in the contract.
- It is critical when fitting resin anchors that the holes are drilled to the correct diameter and depth then thoroughly cleaned using clean compressed air and or brushes.
- When the resin anchor has cured, fasteners should be tightened to the minimum torque and thread engagement. Posts should be sat on a grout bed of between 10 and 30mm where the concrete conditions dictate. Alternatively, a plastic bed with a compressive strength in excess of the plastic moment of the post may be used.
- When the grout has set the anchors should be tightened to 60 to 80Nm

- Surface mounted posts should be manufactured to the correct height for the location the use of detachable height adjusters is not permitted.

System	Containment level	Post Type	Test load
ea	N2W1	C100	60kN
es	N2W2	C125 Type A	60kN
ep	N2W2	C100	50kN
VIK CC2 & CC4	N2W3	Sigma Type B	20kN
ep c/c	N2W4	C100	60kN
en	N2W4	C125 Type A	60kN
Birsta	N2W4	Sigma Type B	20kN
ESP 4.0	N2W5	Sigma Type A	20kN
MegaGuard	H2W1	H	80kN
sk	H2W2	C125 Type B	60kN
bs	H1W2	C125 surface mounted	50kN
ex	H1W2	C100	50kN
ep	H1W3	C100	50kN
Safestar 231	H2W3	C125 Type B	60kN
ec 3.3	H1W3	C125 Type B	60kN
em	H1W4	C125 Type A	60kN
Megaflex	N2W4	160mm x 45mm "Z"	70kN

5 **MegaRail ASSEMBLY**

5.1 **N2, H1 & H2 systems**

- Posts must be set as described in section 4 and the post pitches and positions must be as the system drawings dictate.
- Beams should be hung on the posts using the correct fixing hand tight only. Beams must be hung in the correct orientation so that the teardrop holes in the beam are over the top of the circular holes in the adjoining beam. The system is innovatory designed to ensure there is no requirement for slack removal using tapered bars. The beams are fastened with MegaRail M16 lap bolts. For diameter of the post bolts and all torque settings refer to the MegaRail manual.
- Pedestrian or motor cycle protection should be fitted if it is required as the system is assembled.
- An inspection of the safety barrier should be carried out using the inspection check list on page 20, taking into account the tolerances detailed in section 2.9 above.

NOTE: when securing MEGARAIL fasteners, a minimum of one thread must appear through the nut.

5.2 Connection to TCB and OBB

For connection to either TCB or OBB please see MegaRail drawing MR-GA-040. The system requirements for both NPSBS and MegaRail must be adhered to. When connecting to either TCB or OBB correct system progression must be maintained. If connecting to TCB there must be an adjuster assembly in the TCB within 35m of the connection. Connection to OBB should be made using an A06 connection piece.

5.3 Mega Guard

- Mega Guard should be installed on a concrete foundation. We would recommend minimum dimensions of 500 wide X 700 deep X 4000mm long.
- The foundation should be reinforced to prevent cracking. When using surface mounted posts, these should be fixed with SAFEROAD anchorages if wet set. Or a suitable proprietary resin anchor if post drilled. Posts to be set on a grout bed of between 10 and 30mm. Beams should be hung on the posts using the correct fixing hand tight only. Back Beams must be hung in the correct orientation so that the arrow goes with the flow of traffic. The beams are fastened with Mega Flex M16 lap bolts which should be tightened to between 60 and 80Nm. Post bolts should be tightened to between 25 and 30Nm.
- When Mega Guard is installed as a safety barrier it may also be set in sockets. However, when used as a parapet system it may only be set on base plates.

5.4 Mega Flex Transition & Mega Guard

- There are 3 Types of Mega Flex transition: -
 1. Mega Flex to Mega Guard
 2. Mega Flex to Aluminium Parapet
 3. Mega Flex to Steel Parapet
- Posts must be set as described in section 4. Post pitches must be as the system drawings, deviations within the transition are not permitted.
- Beams should be hung on the posts using the correct fixing hand tight only. Backing beams must be hung in the correct orientation so that the arrow goes with the flow of traffic. The beams are fastened with Mega Flex M16 lap bolts which should be tightened to between 60 and 80Nm.
- Post bolts should be tightened to between 25 and 30Nm.
- An inspection of the safety barrier should be carried out using the inspection check list on page 20.

5.5 **Safe End P1**

The Safe End P1 can be installed on either driven or concrete foundations. The soil suitability should be established by applying the following test. A bending moment of 6.5 kNm (6500Nm) must be achieved before the posts deflection exceeds 100mm, see sections 7 and 8 of this manual. In all circumstances the post nearest the adjoining VRS should be the test post, or a sacrificial post in the same area.

Please note if test data already exists from the adjoining VRS then this is acceptable as confirmation that the ground conditions are suitable for the P1.

The Safe End P1 can be used on high speed roads on the departure end of a VRS. or where the speed limit is less than 50mph on both approach and departure ends of a VRS.

The Safe End P1 can be connected to any N2 W2, W3, W4 or W5 system. The Safe End P1 can also be connected to any H1 W2, W3 or W4 systems that have been dual tested as N2 such as H1W3 ep and H1W3 ec3.3. Refer to System progression chart on page 9 for compatible systems.

5.6 **Safe End P4**

The Safe End P4 can be installed on either driven or concrete foundations, a foundation size of 450mm diameter by 1200mm deep should be sufficient. The soil suitability should be established by applying the following test. A bending moment of 8.5 kNm (8500Nm) must be achieved before the posts deflection exceeds 150mm measured at a height of 610mm, see sections 7 and 8 of this manual.

Please note if positive test data already exists from the adjoining VRS then this is acceptable as confirmation that the ground conditions are suitable for the P4.

If there is no test data for the adjoining VRS then a sacrificial post will be have to be installed to allow testing.

The Safe End P4 can be connected to any N2 system of the following working widths, W1, W2, W3, W4, W5 and W6 which means it can be connected directly to OBB and TCB see system drawings P4-GA drawings. It can also be connected directly to MegaRail H1 W4. For details of connection to

Where the Safe End P4 is being installed over shallow drainage or other obstruction it is advisable to reduce the length of the anchorage nail to an absolute minimum of 800mm, the cut end of the nail should be treated with zinc rich paint in accordance with the galvanising specification BS EN ISO

1461. The shortened nail should be set in a concrete foundation of not less than 500mm square x 900mm deep

5.7 Connection to Other Proprietary VRS

SAFEROAD have such confidence in the MegaRail family of products and their total compliance with EN 1317 that they are willing to allow connection to any other reputable EN 1317 system that has been correctly tested and where the promoters of that system confirm their product will perform correctly up to but not including the joint.

SAFEROAD will guarantee the joint if it has been connected using our fixings and is in specification. We will not however guarantee the performance of the other system. It is critical that in the area of the connection post centres are correct for both systems. Deviations should be at least 8m from the joint.

5.8 Installation on Curves

On curves with a radius greater than 50metre standard beams can be used. Where the radius is less than 50metre the only system that can be used is MegaRail es which is a N2 W2 system with 2 metre post spacings. From 30 metre radius to 50 metre radius 2 metre beams can be used. From 10 metre radius to 30 metre radius pre-formed 2 metre beams must be used.

MegaRail es isn't suitable for radii below 10 metre.

The normal system progression rules must be applied either side of the radius.

MegaGuard cannot be used on radii less than 80 metre.

6. Inspection Maintenance and Repair

6.1 Inspection

One of the MegaRail inspection certificates shown below should be completed for each VRS fence and submitted to the client to confirm the system has been inspected and is certified as compliant. The installation must be checked and certified as compliant using the system drawings. Specification and compliance with the contract drawings should also be agreed. Where installation differs from the contract drawing the reason should be documented. The system will not be deemed compliant unless certified by a suitably qualified person who can demonstrate competence. Either through LANTRA training or approval from SAFEROAD.

VRS INSPECTION CERTIFICATE

DATE:	
CONTRACTOR:	
CONTRACT:	
LOCATION:	
TYPE OF BARRIER:	

CHECKS	Within Specification			COMMENTS
	Yes	No	N/A	
SET BACK				
WORKING WIDTH				
HEIGHT				
SYSTEM PROGRESION				
FASTENERS				
TERMINALS				
BEAM				
POSTS				
FOUNDATIONS				SIZE:
ID MARKINGS				

I confirm that I have checked the safety barrier in the above location and confirm that the inspected work has been completed in accordance with the specification.

Signed on behalf of Installer	Signed on behalf of Contractor/ Client (when applicable),	
Lead Fencer or Supervisor	Main Contractor	Client
Name (Print):	Name (Print):	Name (Print):
Signature:	Signature:	Signature:
Date:	Date:	Date:

6.2 Maintenance

A correctly installed and certified MegaRail VRS is maintenance free for the period of its design life. A visual inspection regime is recommended to check for impact damage. Where this is identified, repairs must be carried out. The visual inspection should also look at the ground conditions as erosion, slippage or ponding water can all affect the viability of a VRS and therefore must be maintained in good order.

6.3 Repair

When repairing MegaRail VRS only components with visual residual plastic deformation need to be replaced. If the deformation is minor damage to a beam and is localised, then no replacement is necessary other than for aesthetic reasons.

Minor damage could be small scratches and indentations which should be treated with a zinc rich paint. Substantially damaged beams must be replaced as must any bent posts. The bolt holes in adjacent beams should be checked for splitting or distortion and if any are identified those beams should also be replaced.

The repaired installation should be checked for compliance with the system specification and an inspection certificate produced. When replacing damaged components all fasteners that are removed must be replaced with new. Care should be taken to ensure ground conditions are suitable to support the replacement posts. Re-compaction of the ground may be required or driven posts may have to be replaced with concrete foundations. If concrete foundations were not designed to be survivable then they should be inspected to ensure no cracking or movement has occurred. If there is evidence of either, then the foundation should be replaced. In all probability it will be necessary and most practical in these circumstances to install a larger foundation thereby removing all the disturbed ground.

Damaged components should be disposed of in an environmentally responsible way.

6.4 Innovation

SAFEROAD lead the VRS market in innovation and continually strive for improvement, so with the passing of time existing installations may not be as per the current drawings, so manuals and drawings from the time of installation should be kept on file.

7 Driven and Foundation Post Testing Requirements

7.1 Ground Conditions

Soil testing must be carried out to establish the strength or compaction of the ground in to which the VRS is to be installed. Tests should be carried out in accordance with SAFEROAD test procedure as detailed below. The frequency of testing should be as described in the contract specific appendix 4/1. As a minimum SAFEROAD recommend that at least one test is carried out for each VRS run or one test for every 200m whichever is the greater. There should be further tests if there is a change in ground conditions for example if the VRS crosses a cut fill line then each ground condition should be tested.

Assuming the ground has been compacted in accordance with MCHW VOL 1 series 600 then standard driven posts should record a pass when the ground is tested.

It should be noted that the soil test takes in to account the plastic moment of each post type when impacted at the angle of the type test which is the design criteria for VRS. This does not take into account the plastic moment of the post through its strongest axis. Therefore foundations installed to meet the required test criteria may move under impact. If this occurs, they should be replaced when the VRS is repaired

When installing concrete foundations that are required by the design organisation to be survivable (this should be made clear in appendix 4/1). The deflection for a VRS post in a survivable concrete foundation should be no more than 50mm thereby mitigating the risk of displacement when impacted outside of the parameters set down in the initial type test although there is no guarantee of this.

7.2 **Soil test criteria**

Sigma 100 driven and foundation

A bending moment of 6.5 kNm (6500Nm) must be achieved before the posts deflection exceeds 100mm.

C 125 driven and foundation

A bending moment of 8.5 kNm (8500Nm) must be achieved before the posts deflection exceeds 150mm.

C100 with stiffener driven and foundation

A bending moment of 8.5 kNm (8500Nm) must be achieved before the posts deflection exceeds 150mm.

Mega Flex Transition Post Z section driven and foundation

A bending moment of 9kNm (9000Nm) must be achieved before the post deflection exceeds 150mm.

The deflection should be measured at 610mm. See loading chart page 26.

Mega Guard Post H section foundation only, no driven post available.

A bending moment of 9kNm (9000Nm) must be achieved before the post deflection exceeds 100mm.

The deflection should be measured at 610mm. See loading chart page 26.

7.3 **Recording Foundation Test Results**

Foundation test results should be recorded on a test result form an example of this is shown on the next page.

8. Post and Foundation soil test Procedure

8.1 Procedure

1. The test should be applied in the direction it would be loaded in service. In the case of double sided barrier the load should be applied in the direction of the weakest side of the foundation.
2. Check that the gauge is in calibration and the certificate is available.
3. Locate the reaction vehicle in a suitable position. The reaction vehicle can be any suitable vehicle or piece of plant weighing not less than 3 tonnes an Orteco rig is adequate. Packing may be required to provide a suitable flat surface to push against. (See Diagram 1 on page 26)
4. Connect the hydraulic pipes to the cylinder ram (A) and the pump (B).
5. Fit the appropriate post top box (C) or post push guide (D) to the cylinder ram.
6. If required fit the extension rod or tube (E) on the other end of the cylinder ram.
7. Place the post box or post guide on the post and position the other end of the assembly against the reaction vehicle or packing, ensuring that the cylinder ram is horizontally level.
8. After checking that the pump is in push mode, gently pump until the assembly is wedged in place, but the pressure on the pump gauge still reads zero.
9. Check that the ram will push against the post centrally and is still level horizontally.
10. Install the datum peg (F) in a direct line from the ram and post.
11. Measure the height of the ram in accordance with the 1.5 metre setback rules (diagram 2 on page 26), then using height to pressure loading chart on page 27 to determine what pressure to pump to, to achieve the desired bending moment.
12. Record the measurement from the datum peg to the post at a height of 610mm. The 610mm height is determined in accordance with the 1.5 metre setback rules (diagram 2 on page 26).
13. Gently apply load using the pump until the gauge reads 1 kN (1000 N).
14. Record the new measurement between the datum peg and the post.
15. Increase load in 1 kN increments and record findings until
 - (a) The required bending moment is achieved.
 - (b) The post deflection exceeds the permitted allowance.
 - (c) The plastic moment of the post is reached without any lateral movement of the foundation.

16. Record the results on a post test result sheet, an example of which is on page 24.

17. Pass the results over to the client within 48 hrs.

8.2 Push Test Drawings

Diagram 1


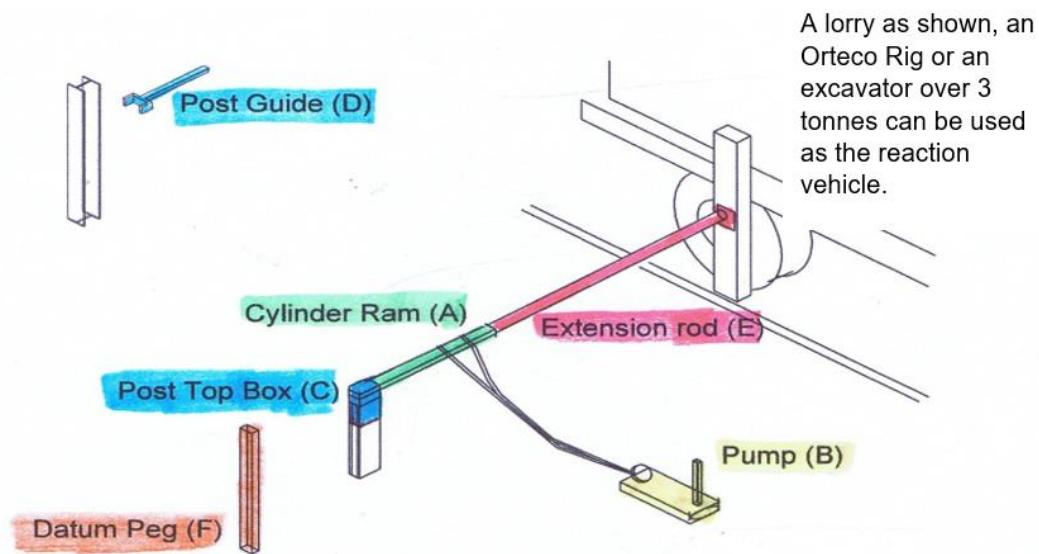


Diagram 2

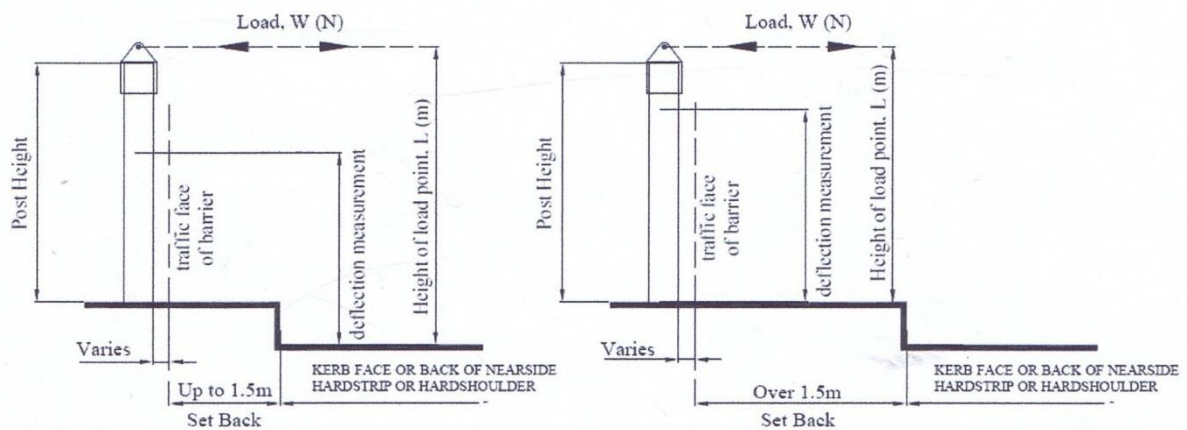

8.3 Pressure Loading Chart
C100 with stiffener

Sigma 100		and C 125		Mega Flex		Mega Guard			
Loading height in mtrs	Pressure in kN	Loading height in mtrs	Pressure in kN	Loading height in mtrs	Pressure in kN	Loading height in mtrs	Pressure in kN	Loading height in mtrs	Pressure in kN
0.60	10.83	0.60	14.17	0.60	15.00	0.60	15.25	1.00	9.15
0.61	10.66	0.61	13.93	0.61	14.75	0.61	15.00	1.01	9.06
0.62	10.48	0.62	13.71	0.62	14.52	0.62	14.76	1.02	8.97
0.63	10.32	0.63	13.49	0.63	14.29	0.63	14.52	1.03	8.88
0.64	10.16	0.64	13.28	0.64	14.06	0.64	14.30	1.04	8.80
0.65	10.00	0.65	13.08	0.65	13.85	0.65	14.08	1.05	8.71
0.66	9.85	0.66	12.88	0.66	13.64	0.66	13.86	1.06	8.63
0.67	9.70	0.67	12.69	0.67	13.43	0.67	13.66	1.07	8.55
0.68	9.56	0.68	12.50	0.68	13.24	0.68	13.46	1.08	8.47
0.69	9.42	0.69	12.32	0.69	13.04	0.69	13.26	1.09	8.39
0.70	9.29	0.70	12.14	0.70	12.86	0.70	13.07	1.10	8.32
0.71	9.15	0.71	11.97	0.71	12.68	0.71	12.89	1.11	8.24
0.72	9.03	0.72	11.81	0.72	12.50	0.72	12.71	1.12	8.17
0.73	8.90	0.73	11.64	0.73	12.33	0.73	12.53	1.13	8.10
0.74	8.78	0.74	11.49	0.74	12.16	0.74	12.36	1.14	8.03
0.75	8.67	0.75	11.33	0.75	12.00	0.75	12.20	1.15	7.96
0.76	8.55	0.76	11.18	0.76	11.84	0.76	12.04	1.16	7.89
0.77	8.44	0.77	11.04	0.77	11.69	0.77	11.88	1.17	7.82
0.78	8.33	0.78	10.90	0.78	11.54	0.78	11.73	1.18	7.75
0.79	8.23	0.79	10.76	0.79	11.39	0.79	11.58	1.19	7.69
0.80	8.13	0.80	10.63	0.80	11.25	0.80	11.44	1.20	7.63
0.81	8.02	0.81	10.49	0.81	11.11	0.81	11.30	1.21	7.56
0.82	7.93	0.82	10.37	0.82	10.98	0.82	11.16	1.22	7.50
0.83	7.83	0.83	10.24	0.83	10.84	0.83	11.02	1.23	7.44
0.84	7.74	0.84	10.12	0.84	10.71	0.84	10.89	1.24	7.38
0.85	7.65	0.85	10.00	0.85	10.59	0.85	10.76	1.25	7.32
0.86	7.56	0.86	9.88	0.86	10.47	0.86	10.64	1.26	7.26
0.87	7.47	0.87	9.77	0.87	10.34	0.87	10.52	1.27	7.20
0.88	7.39	0.88	9.66	0.88	10.23	0.88	10.40	1.28	7.15
0.89	7.30	0.89	9.55	0.89	10.11	0.89	10.28	1.29	7.09
0.90	7.22	0.90	9.44	0.90	10.00	0.90	10.17	1.30	7.04
0.91	7.14	0.91	9.34	0.91	9.89	0.91	10.05	1.31	6.98
0.92	7.07	0.92	9.24	0.92	9.78	0.92	9.95	1.32	6.93
0.93	6.99	0.93	9.14	0.93	9.68	0.93	9.84	1.33	6.88
0.94	6.91	0.94	9.04	0.94	9.57	0.94	9.73	1.34	6.83
0.95	6.84	0.95	8.95	0.95	9.47	0.95	9.63	1.35	6.78
0.96	6.77	0.96	8.85	0.96	9.38	0.96	9.53	1.36	6.73
0.97	6.70	0.97	8.76	0.97	9.28	0.97	9.43	1.37	6.68
0.98	6.63	0.98	8.67	0.98	9.18	0.98	9.34	1.38	6.63
0.99	6.57	0.99	8.59	0.99	9.09	0.99	9.24	1.39	6.58
1.00	6.50	1.00	8.50	1.00	9.00	1.00	9.15	1.40	6.54

This is the datum bending moment. All calculations are determined from this figure. Divide the datum bending moment by the height in metres to determine the pressure required in kN to achieve the correct loading required at that

Permissible maximum deflections measured at 610mm high

D = Driven post
C = Compliant concrete foundation
S = Survivable concrete foundation. See sections 2.11 & 7.1

Sigma 100	
D	100mm
C	100mm
S	50mm

C 100 with stiffener and C 125	
D	150mm
C	150mm
S	50mm

Mega Flex	
D	150mm
C	150mm
S	50mm

Mega Guard	
C	100mm
S	50mm

9 - Company contact details:-

Head office

SAFEROAD
Concorde House
Bessemer Way
Scunthorpe
North Lincolnshire
DN15 8XE
Tel: 01724 289119
Fax: 01724 281478

Warehousing and training

Cleatham Road Business Park
Cleatham Road
Kirton in Lindsey
DN21 4JR
Tel 01724 701860

For Material Supply Information

Email – jonathan.craik@saferoad.co.uk

For Technical Information

Email – john.cudlipp@saferoad.co.uk

For Training Requirements

Email – kev.young@saferoad.co.uk